



ENGAGED INDUSTRIES

STV .22 Specifications

Material: 3Al2.5V Titanium 3D printed body with Type 3 Anodized 6061-T6 attachment Mount.


DT (Direct Thread) Configuration

Weight: (Suppressor Only) 3 oz
(Including DT Coupler) 3.5 oz

Length: Total Length 5.45"
Added length to firearm 5.05" (SAAMI Spec .22LR muzzle threads)

Figure1.

Item #	Part	Qty
1	Half section 1 (serialized)	1
2	Half Section 2	1
3	Direct thread (DT) Mount	1

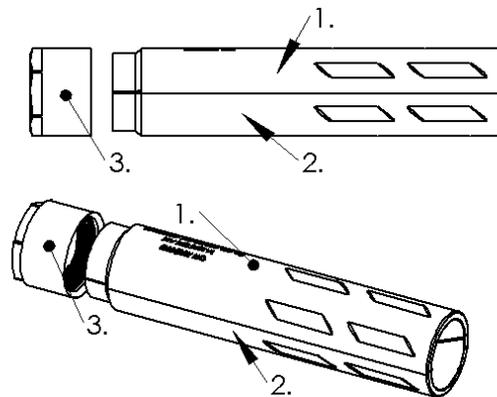

Compatibility Chart: (NOTE: Determine barrel thread and purchase thread adapter if necessary)

Cartridge	Bullet Diameter (inches)
.17 HMR	.172
.17 Hornet	.172
.17 Remington	.172
.17 WSM	.172
.22 Short	.222
.22 Long Rifle (LR)	.223
.22 WMR (Magnum)	.224

